

**CONQUER** Fuse Holders Feature For Easy Removal, Clearly Printed/Imprinted "FUSE" designation For Easy Panel Identification And Keyed Mounting Hole Requirement For Anti-Rotation Safety. All Fuse Holders Include Mounting Washer And Solder Lugs For Wiring.

# Specification Guide Codes:

**A** = Item Number

**B** = Rated Current

**C** = Insulation Resistance At 500 V DC

**D** = Contact Resistance

**E** = Dielectric Strength For 60 Seconds

• **Insulating Body** : Flame Retarding UL 94 V0 Thermoplastic Material.

• **Contact** : Nickel or Tin Plated Copper Alloy.

### PANEL MOUNT FUSE HOLDER FOR 5x20mm FUSE

**HOT**



**CQ-206S**

**RoHS**

**B**: 10A 250V.


**C**: 100MΩ Min

**D**: 5mΩ At 1A DC

**E**: AC2000V Min.

**Screw Driver Knob**

Approval:

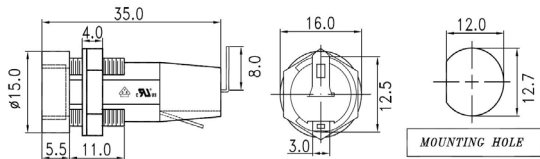

**HOT**



**CQ-206C**

**RoHS**

**B**: 10A 250V.


**C**: 100MΩ Min

**D**: 5mΩ At 1A DC

**E**: AC1000V Min.

**Bayonet Knob**

Approval:

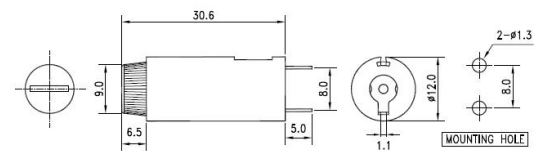

**CQ-206B**

**RoHS**

**B**: 10A 250V.



**C**: 100MΩ Min

**D**: 5mΩ At 1A DC

**E**: AC2000V Min.

**Bayonet Driver Knob**

Approval:

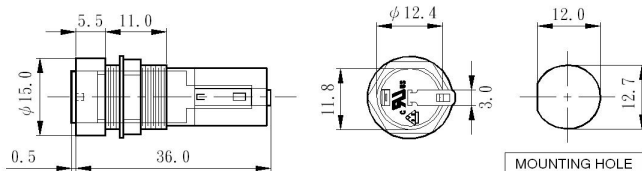

**CQ-206CV**

**RoHS**

**B**: 10A 250V.


**C**: 100MΩ Min

**D**: 5mΩ At 1A DC

**E**: AC1000V Min.

**Bayonet Knob**

Approval:

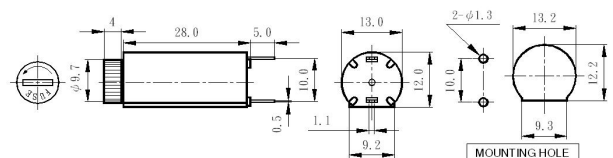

**HOT**



**CQ-206CH**

**RoHS**

**B**: 10A 250V.


**C**: 100MΩ Min

**D**: 5mΩ At 1A DC

**E**: AC1000V Min.

**Bayonet Knob**

Approval:

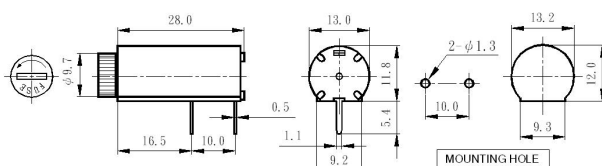

**CQ-206HU**

**RoHS**

**B**: 10A 250V.

**C**: 100MΩ Min

**D**: 5mΩ At 1A DC

**E**: AC2000V Min.

**Screw knob**

Approval:

